

# AcuHUM™ OA Series

Outdoor Air Relative Humidity  
& Temperature Sensor Datasheet



Advanced digital polymer sensing technology provides precise relative humidity (RH) measurement, the AcuHUM OA series outdoor air relative humidity sensor offers long-term stability, fast response time, and ability to recover from condensation. The RH sensor can be mounted onto a vertical surface for monitoring outdoor RH/temperature. With an IP65 rated enclosure, it is suitable for sheltered outdoor locations and protect against dust ingress and water. The AcuHUM OA sensor also features an optional thermistor, RTD, or transmitter to conveniently provide a temperature and RH measurement in a single device.

## Features

- IP65 enclosure protects RH sensor from ingress dust & water moisture, ideal for outdoor applications.
- $\pm 2\%$  high-accuracy RH measurement with optional temperature measurement up to  $0.2^{\circ}\text{C}$  ( $0.36^{\circ}\text{F}$ ) accuracy.
- Quick installation with push button terminal blocks and quick release screws.
- Fast response time of  $<10$  seconds & small humidity drift  $<\pm 0.5\%$  RH/year.
- 4-20mA and 0-10VDC output options are an ideal fit with various BAS controllers.
- 100 $\Omega$  Platinum, 1K $\Omega$  Platinum/Nickel RTDs & 10K $\Omega$  Type II/Type III, 20K $\Omega$  thermistors available.
- Optional custom configuration for temperature measurement.



## Specifications

### Relative Humidity Measurement

#### ELECTRICAL

Voltage Power	19.2~28.8VAC or VDC
Current Power	19.2~28.8VDC (RL=500 $\Omega$ ); 8.5~35 VDC (RL=0 $\Omega$ )
Output	4~20mA (2 Wires) or 0~10VDC (3 Wires)

#### RELATIVE HUMIDITY PERFORMANCE

RH Sensor Type	Digital Polymer
Accuracy	$\pm 2\%$ ( $25^{\circ}\text{C}$ , 20~80%RH); $\pm 3\%$ (0~95%RH)
Measurement RH Range	0~100%
Operating RH Range	0~95%RH (Non-Condensing)
Hysteresis	$<\pm 1\%$ RH
Response Time	$<10\text{s}$ ( $25^{\circ}\text{C}$ , in Slow Air)
Drift	$<\pm 0.5\%$ RH/year

### Temperature Measurement

#### ELECTRICAL

Transmitter Voltage Power	19.2~28.8 VAC or VDC
Transmitter Current Power	19.2~28.8 VDC (RL=500 $\Omega$ ); 8.5~35 VDC (RL=0 $\Omega$ )
Transmitter Output	4~20mA (2 Wires) or 0~10VDC (3 Wires)
Output Load	$\leq 500\Omega$ (Current), $\geq 2\text{K}\Omega$ (Voltage)

#### TEMPERATURE PERFORMANCE

Temperature Sensor Type	RTD or Thermistor, See Ordering Information
Transmitter Accuracy (If Applicable)	$<\pm 0.3^{\circ}\text{C}$ @ $5\sim 60^{\circ}\text{C}$ ( $<\pm 0.54^{\circ}\text{F}$ @ $41\sim 140^{\circ}\text{F}$ )
Thermistor Accuracy (If Applicable)	10K $\Omega$ , Type III - $\pm 0.3^{\circ}\text{C}$ @ $25^{\circ}\text{C}$ ( $0.54^{\circ}\text{F}$ @ $77^{\circ}\text{F}$ ) 10K $\Omega$ , Type II - $\pm 0.2^{\circ}\text{C}$ @ $25^{\circ}\text{C}$ ( $0.36^{\circ}\text{F}$ @ $77^{\circ}\text{F}$ ) 20K $\Omega$ - $\pm 0.2^{\circ}\text{C}$ @ $25^{\circ}\text{C}$ ( $0.36^{\circ}\text{F}$ @ $77^{\circ}\text{F}$ )
RTD Accuracy (If Applicable)	1K $\Omega$ Platinum - $\pm 0.2^{\circ}\text{C}$ @ $25^{\circ}\text{C}$ ( $0.36^{\circ}\text{F}$ @ $77^{\circ}\text{F}$ ) 100 $\Omega$ Platinum - $\pm 0.2^{\circ}\text{C}$ @ $25^{\circ}\text{C}$ ( $0.36^{\circ}\text{F}$ @ $77^{\circ}\text{F}$ ) 1K Ni $\Omega$ Nickel - $\pm 0.5^{\circ}\text{C}$ @ $25^{\circ}\text{C}$ ( $0.9^{\circ}\text{F}$ @ $77^{\circ}\text{F}$ )
Temperature Transmitter Measurement Range	$-40\sim 60^{\circ}\text{C}$ ( $-40\sim 140^{\circ}\text{F}$ )
Response Time	$<10\text{s}$

#### ENVIRONMENTAL

Operating Temperature Range	$-20\sim 70^{\circ}\text{C}$ ( $-4\sim 158^{\circ}\text{F}$ )
Storage Temperature	$-30\sim 80^{\circ}\text{C}$ ( $-22\sim 176^{\circ}\text{F}$ )


#### MECHANICAL

Mounting	Screw Surface Mount
Wiring Connection	Push Button Terminal Blocks
Weight	240g (0.53 lbs)

#### CERTIFICATIONS/WARRANTY

Enclosure Material	Fire Retardant Polycarbonate UL94V-0
Protection	IP65
Agency Approvals	CE
Warranty	5 Years

Dimensions

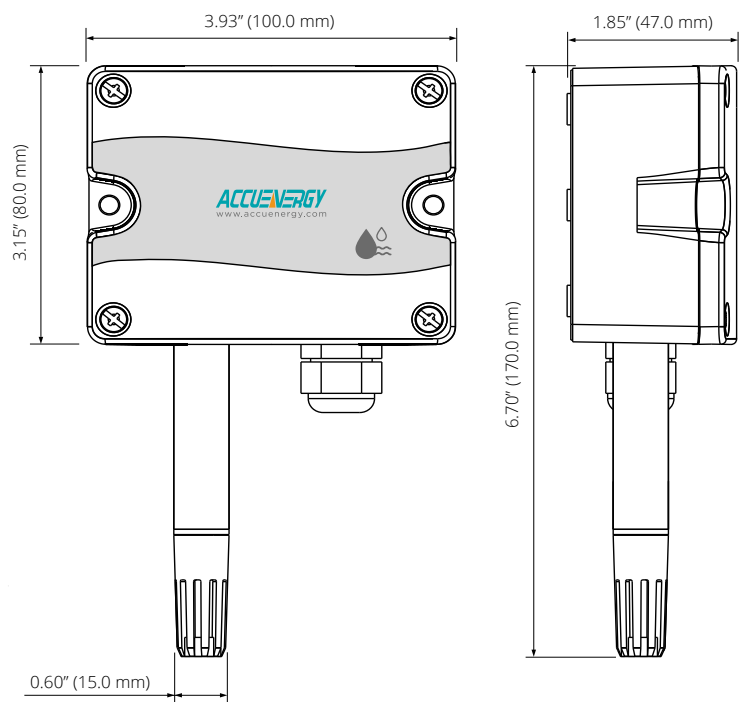

Ordering Information

+

Model	- RH Analog Output	- Temperature Analog Output	- Temperature Sensor
AcuHUM-OA	A: 4-20 mA Transmitter	A: Resistive Thermistor or RTD	01: 10KΩ, Type III Thermistor
	B: 0-10 VDC Transmitter		02: 10KΩ, Type II Thermistor
			03: 20KΩ Thermistor
			04: 1KΩ Platinum RTD, 2 Wires
			05: 100Ω Platinum RTD, 2 Wires
			06: 1KΩ Nickel RTD, 2 Wires
			A: 4-20 mA Transmitter
			08: XMTR, 1KΩ Platinum RTD Other Span
	B: 0-10VDC Transmitter	C: 0-10VDC Transmitter	07: XMTR, 1KΩ Platinum RTD -40-60°C (-40-140°F)
			08: XMTR, 1KΩ Platinum RTD Other Span
	A: 4-20mA Transmitter	D: No Temperature Output	00: No Temperature Output
	B: 0-10VDC Transmitter		
Ordering Example: AcuHUM-OA-B-C-07			

Note: Selecting the "08 XMTR, 1K Ω RTD Other Span" temperature sensor option allows the transmitter to be calibrated within a -40°C to +100°C (-40°F to 212°F) measurement range. The custom range must be specified at the time of ordering.




**Accuenergy Inc.**  
 Los Angeles - Toronto - Pretoria  
 North America Toll Free: 1-877-721-8908  
 Web: [www.accuenergy.com](http://www.accuenergy.com)  
 Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)

Revision Date: May 2025 Version: 1.0.0  
 Specs Subject To Change Without Notice.

# AcuHUM™ OAW Series

Outdoor Air Relative Humidity & Temperature Sensor with Weather Shield Datasheet

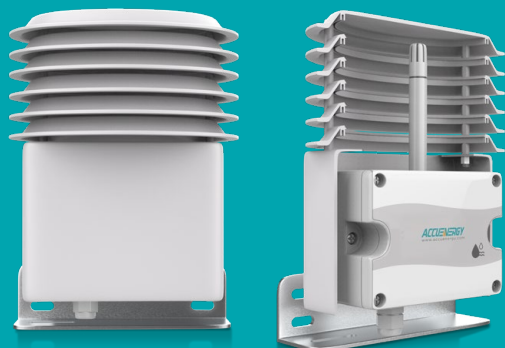

The AcuHUM OAW outdoor air humidity and temperature sensors is IP65 rated and reinforced with a weather shield to protect against harsh weather exposure for more accurate readings. The six-layered weather shield features natural ventilation, reducing the thermal effect of UV radiation, snow, and rain, improving response time, and producing accurate measurement for long-term outdoor conditions. The AcuHUM OAW sensors offer optional thermistor, RTD, or transmitter to provide temperature and RH readings in a single device.

## Features

- Weather shield for enhanced humidity sensor protection from harsh environmental conditions while directing air flow for more accurate measurements.
- IP65 enclosure protects RH sensor from ingress dust & water moisture, ideal for outdoor applications.
- $\pm 2\%$  (25°C, 20~80% RH) high-accuracy relative humidity measurement with optional temperature measurement up to 0.2°C (0.36°F) accuracy.
- Fast response of <10 seconds, and small humidity drift  $\leq \pm 0.5\%$  RH/year.
- 4~20mA and 0~10VDC output transmitter options ideal for different BAS controllers.
- 100Ω Platinum, 1KΩ Platinum/Nickel RTDs & 10KΩ Type II/Type III, 20KΩ thermistors available.
- Optional custom configuration for temperature measurement.



## Specifications

### Relative Humidity Measurement

#### ELECTRICAL

Voltage Power	19.2~28.8VAC or VDC
Current Power	19.2~28.8VDC (RL=500Ω); 8.5~35VDC (RL=0Ω)
Output	4~20mA (2 Wires) or 0~10VDC (3 Wires)

#### RELATIVE HUMIDITY PERFORMANCE

RH Sensor Type	Digital Polymer
Accuracy	$\pm 2\%$ (25°C, 20~80%RH); $\pm 3\%$ (0~95%RH)
Measurement RH Range	0~100%
Operating RH Range	0~95%RH (Non Condensing)
Hysteresis	$\leq \pm 1\%$ RH
Response Time	<10s (25°C, in Slow Air)
Drift	$\leq \pm 0.5\%$ RH/year

### Temperature Measurement

#### ELECTRICAL

Transmitter Voltage Power	19.2~28.8VAC or VDC
Transmitter Current Power	19.2~28.8VDC (RL=500Ω); 8.5~35 VDC (RL=0Ω)
Transmitter Output	4~20mA (2 Wires) or 0~10VDC (3 Wires)
Output Load	$\leq 500\Omega$ (Current), $\geq 2K\Omega$ (Voltage)

#### TEMPERATURE PERFORMANCE

Temperature Sensor Type	RTD or Thermistor, See Ordering Information
Transmitter Accuracy (If Applicable)	$\leq \pm 0.4^\circ\text{C}$ @ 5~60°C ( $\leq \pm 0.72^\circ\text{F}$ @ 41~140°F)
Thermistor Accuracy (If Applicable)	10KΩ, Type III - $\pm 0.3^\circ\text{C}$ @ 25°C (0.54°F @ 77°F) 10KΩ, Type II - $\pm 0.2^\circ\text{C}$ @ 25°C (0.36°F @ 77°F) 20KΩ - $\pm 0.2^\circ\text{C}$ @ 25°C (0.36°F @ 77°F)
RTD Accuracy (If Applicable)	1KΩ Platinum - $\pm 0.2^\circ\text{C}$ @ 25°C (0.36°F @ 77°F) 100Ω Platinum - $\pm 0.2^\circ\text{C}$ @ 25°C (0.36°F @ 77°F) 1KΩ Nickel - $\pm 0.5^\circ\text{C}$ @ 25°C (0.9°F @ 77°F)
Temperature Transmitter Measurement Range	-40~60°C (-40~140°F)
Response Time	<10s

#### ENVIRONMENTAL

Operating Temperature Range	-20~70°C (-4~158°F)
Storage Temperature	-30~80°C (-22~176°F)


#### MECHANICAL

Mounting	4-Screw L-Shape bracket for surface installation on vertical wall, flat roof, or round column with worm gear clamps (gear clamps not provided).
Wiring Connection	Push Button Terminal Blocks
Weight	910g (2.00lbs)

#### CERTIFICATIONS/WARRANTY

Enclosure Material	6-layer anti-radiation weather shield: flame retardant, anti-ultraviolet, anti-oxidation PC+ABS UL94V-0
Protection	IP65
Agency Approvals	CE
Warranty	5 Years

Dimensions

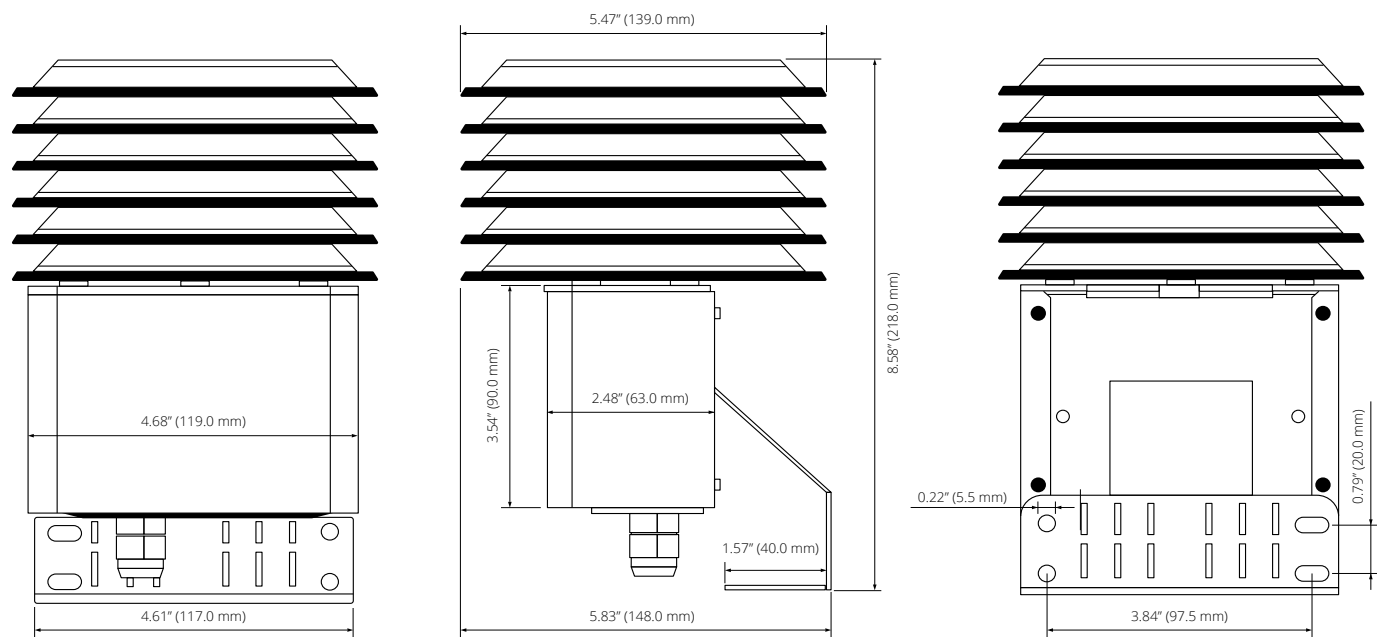

Ordering Information

+	Model	- RH Analog Output	- Temperature Output	- Temperature Sensor
	AcuHUM-OAW	A: 4-20 mA Transmitter	A: Resistive Thermistor or RTD	01: 10KΩ, Type III Thermistor
		B: 0-10 VDC Transmitter		02: 10KΩ, Type II Thermistor
				03: 20KΩ Thermistor
				04: 1KΩ Platinum RTD, 2 Wires
				05: 100Ω Platinum RTD, 2 Wires
				06: 1KΩ Nickel RTD, 2 Wires
		A: 4-20 mA Transmitter	B: 4-20mA Transmitter	07: XMTR, 1KΩ RTD -40-60°C (-40-140°F)
				08: XMTR, 1KΩ RTD Other Span
		B: 0-10VDC Transmitter	C: 0-10VDC Transmitter	07: XMTR, 1KΩ RTD -40-60°C (-40-140°F)
				08: XMTR, 1KΩ RTD Other Span
		A: 4-20mA Transmitter	D: No Temperature Output	00: No Temperature Output
		B: 0-10VDC Transmitter		
Ordering Example: AcuHUM-OAW-A-A-02				

Note: Selecting the "08 XMTR, 1KΩ RTD Other Span" temperature sensor option allows the transmitter to be calibrated within a -40°C to +100°C (-40°F to 212°F) measurement range. The custom range must be specified at the time of ordering.



Accuenergy Inc.  
Los Angeles - Toronto - Pretoria  
North America Toll Free: 1-877-721-8908  
Web: [www.accuenergy.com](http://www.accuenergy.com)  
Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)

Revision Date: May 2025 Version: 1.0.0  
Specs Subject To Change Without Notice.