

AcuHUM™ RM Series

Room Mount Relative Humidity
& Temperature Sensor Datasheet



The AcuHUM RM series room mount relative humidity (RH) sensor utilizes advanced digital polymer sensing technology to provide highly precise RH measurement, reduce power consumption, and improve long-term stability. The RH sensor features an optional thermistor, RTD, or transmitter to provide temperature and RH signals in one device. The AcuHUM RM is designed to be wall-mounted indoors with a four-way aspiration enclosure design to minimize self-heating. It can be ordered with an optional LCD to display humidity and temperature in one device.

Features

- Polycarbonate housing design for easy wall/surface mount or junction box.
- High-accuracy relative humidity & optional temperature measurement output.
- RH temperature compensation correction offering $\pm 2\%$ accuracy measurement.
- $<10s$ response time, low drift, $<\pm 0.5\%$ RH per year, and $<\pm 1\%$ RH hysteresis.
- Protection against over-voltage, reverse polarity & electromagnetic interference.
- 4-20mA & 0-10VDC output transmitter options for various BAS controllers.
- 100 Ω Platinum, 1K Ω Platinum/Nickel RTDs & 10K Ω Type II/Type III, 20K Ω thermistors available.
- Optional custom configuration for temperature measurement.
- LCD displays RH and optional temperature output sequentially.



Specifications

Relative Humidity Measurement

ELECTRICAL

Voltage Power	16~28VAC / 16~35VDC
Current Power	18.5~35VDC (RL=500 Ω); 8.5~35VDC (RL=0 Ω)
Output	4~20mA (2 Wires) or 0~10VDC (3 Wires)

RELATIVE HUMIDITY PERFORMANCE

RH Sensor Type	Digital Polymer
Accuracy	$\pm 2\%$ (25°C, 20~80%RH)
Measurement RH Range	0~100%
Operating RH Range	5~95%RH (Non-Condensing)
Hysteresis	$<\pm 1\%$ RH
Response Time	$<10s$ (25°C, in Slow Air)
Drift	$<\pm 0.5\%$ RH/Year

Temperature Measurement

ELECTRICAL

Transmitter Voltage Power	16~28VAC / 16~35VDC
Transmitter Current Power	18.5~35VDC (RL=500 Ω); 8.5~35VDC (RL=0 Ω)
Transmitter Output	4~20mA (2 Wires) or 0~10VDC (3 Wires)
Output Load	$\leq 500\Omega$ (Current), $\geq 2K\Omega$ (Voltage)

TEMPERATURE PERFORMANCE

Temperature Sensor Type	RTD or Thermistor, See Ordering Information
Transmitter Accuracy (If Applicable)	$<\pm 0.3^\circ\text{C}$ @ 5~60°C ($<\pm 0.54^\circ\text{F}$ @ 41~140°F)
Thermistor Accuracy (If Applicable)	10K Ω , Type III - $\pm 0.3^\circ\text{C}$ @ 25°C (0.54°F @ 77°F) 10K Ω , Type II - $\pm 0.2^\circ\text{C}$ @ 25°C (0.36°F @ 77°F) 20K Ω - $\pm 0.2^\circ\text{C}$ @ 25°C (0.36°F @ 77°F)
RTD Accuracy (If Applicable)	1K Ω Platinum - $\pm 0.2^\circ\text{C}$ @ 25°C (0.36°F @ 77°F) 100 Ω Platinum - $\pm 0.2^\circ\text{C}$ @ 25°C (0.36°F @ 77°F) 1K Ni Ω Nickel - $\pm 0.5^\circ\text{C}$ @ 25°C (0.9°F @ 77°F)
Temperature Transmitter Measurement Range	0~50°C (32~122°F)
Response Time	$<10s$

ENVIRONMENTAL

Operating Temperature Range	-20~70°C (-4~158°F)
Storage Temperature	-20~80°C (-4~176°F)


MECHANICAL

Mounting	Single Gang Junction Box or Surface Mount
Wiring Connection	Screw Terminal Blocks
Weight	110g (0.24lbs)
Display (Optional)	4-Digit LCD with Unit Indication
Display Resolution	0.1°C (0.1°F), 0.1%RH

CERTIFICATIONS/WARRANTY

Enclosure Material	Fire Retardant Polycarbonate (UL94V-0)
Protection	IP30
Agency Approvals	CE
Warranty	5 Years

Dimensions

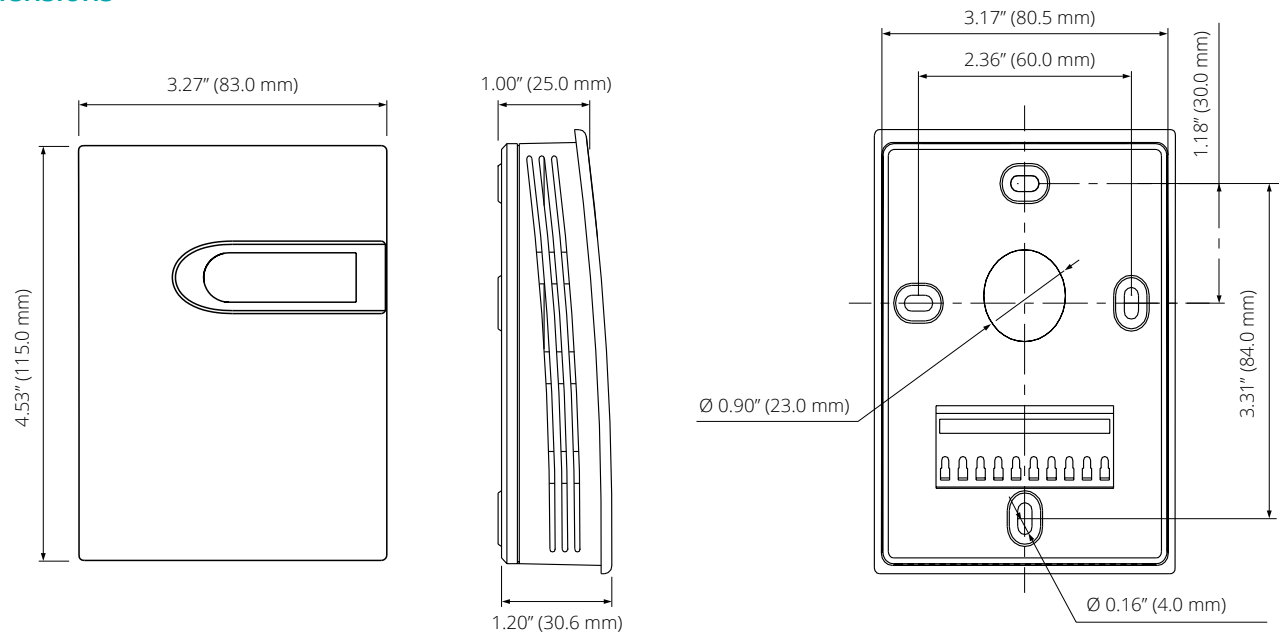

Ordering Information

+	Model	- RH Analog Output	- Temperature Output	- Temperature Sensor	Display
	AcuHUM-RM	A: 4-20 mA Transmitter	A: Resistive Output	01: 10KΩ, Type III Thermistor	A: With Display, Fahrenheit
		B: 0-10 VDC Transmitter		02: 10KΩ, Type II Thermistor	B: With Display, Celsius
				03: 20KΩ Thermistor	C: No Display
				04: 1KΩ Platinum RTD, 2 Wires	
				05: 100Ω Platinum RTD, 2 Wires	
				06: 1KΩ Nickel RTD, 2 Wires	
		A: 4-20 mA Transmitter	B: 4-20mA Output	07: Transmitter, 1KΩ Platinum RTD 0-50°C (32-122°F)	A: With Display, Fahrenheit ¹
				08: Transmitter, 1KΩ Platinum RTD Other Span	B: With Display, Celsius
					C: No Display
		B: 0-10VDC Transmitter	C: 0-10VDC Output	07: Transmitter, 1KΩ Platinum RTD 0-50°C (32-122°F)	A: With Display, Fahrenheit
				08: Transmitter, 1KΩ Platinum RTD Other Span	B: With Display, Celsius
					C: No Display
		A: 4-20mA Transmitter	D: No Temperature Output	00: No Temperature Output	A: With Display, RH Only
		B: 0-10VDC Transmitter			C: No Display
Ordering Example: AcuHUM-RM-A-A-02-A					

Note: Selecting the "08 XMTR, 1KΩ RTD Other Span" temperature sensor option allows the transmitter to be calibrated within a -40°C to +100°C (-40°F to 212°F) measurement range. The custom range must be specified at the time of ordering.



Accuenergy Inc.
 Los Angeles - Toronto - Pretoria
 North America Toll Free: 1-877-721-8908
 Web: www.accuenergy.com
 Email: marketing@accuenergy.com

Revision Date: May 2025 Version: 1.0.0
 Specs Subject To Change Without Notice.